

InteliCharger 65/24 A



Order code: ICHG-65-24-A

Automatic Battery Charger

Datasheet

Product description

Automatic battery chargers provide a cost effective solution to most industrial battery charging requirements. The two stage constant current – constant voltage characteristic ensures accurate and efficient battery charging and is designed for permanent connection to the batteries maintaining them in a fully charged condition without overcharging. Device can be also set as power supply.

Key features

- ▶ Cost effective
- ▶ Micro-processor control
- ▶ Compact size – DIN rail mounting
- ▶ Sealed electronic construction
- ▶ Robust & high reliability
- ▶ Fully automatic operation
- ▶ Power supply mode
- ▶ Universal AC input ranges
- ▶ Low ripple output
- ▶ Passive cooling

Certifications and standards

- ▶ EN 62368-1
- ▶ EN 61000-6-2
- ▶ EN 61000-6-4
- ▶ UL 1236 Edition 8
- ▶ CSA C22.2 No. 107.2-01
- ▶ RoHS 3 Directive (EU 2015/863)



Technical data

Operating conditions

Working Temperature	-10 °C to +50 °C
Working Humidity	20 to 90 % RH
Storage Temperature	-20 °C to +85 °C
Storage Humidity	10 to 95 % RH
Unpacked Weight	400 g
Withstand Voltage	Input – Output 1.5 kV AC
Isolation Resistance	Input – Output 500 V DC / 100MΩ

Protections

Overload Protection	Constant Current Limit/Fold back
Over Voltage Protection	105 % - 125 % Shutdown. Recycle I/P to restart
Over Temp. Protection	Output shutdown with automatic recovery
Reversed Battery Protection	Automatic protection. Disabled when in PSU mode.

Input Specification

Voltage Range, V_{IN}	90 to 264 V AC
Frequency	47 to 63 Hz
Input Current	1.5 A rms max.
Leakage Current	None


Output Specification

Voltage/Current	24.0 V Nominal 3.0 A _{pk}
Ripple & Noise	±0.5 %
Line Regulation	±1.0 %
Load Regulation	±1.5 %
Efficiency	Up to 90 %


Alarms and Levels

DC Output Voltages	Float = Factory set to 27.6 V Boost = Float Voltage +4 V
AC / Charger Fail	Loss of AC input or DC output voltage ctrl
Low DC Voltage Alarm	Float Voltage -12 % Alarm, -8 % Reset
High DC Voltage Alarm	Float Voltage +7 % Alarm, +5 % Reset
Over Voltage Protection	Float Voltage +10 %, instant SD
Battery Disconnected	Open circuit on DC output

Dimensions, terminals and mounting

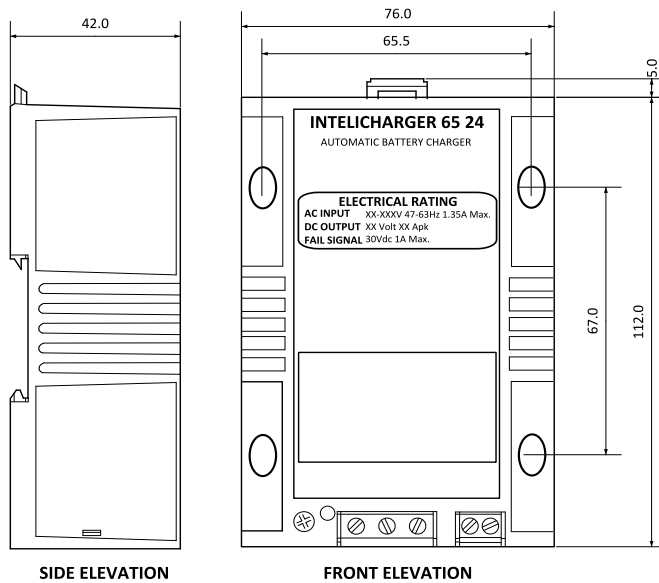

Power supply mode

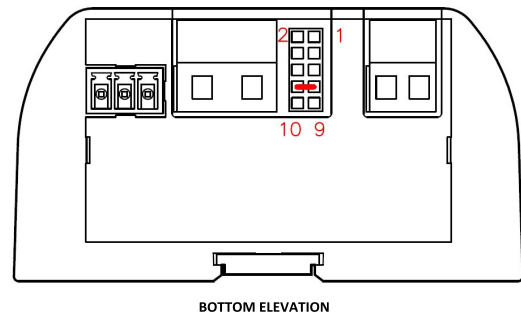

To activate Power supply mode connect pin 7 and 8.

No connection = Default = Charger mode

Note: Dimensions are in mm.

Calibration

1. Disconnect the battery. Connect a DC voltmeter to the \pm output terminals.
2. Turn the "CAL" potentiometer fully anti-clockwise. When the status LED flashes green/red @5 Hz, adjust the "CAL" potentiometer and set the desired float voltage level.
3. When the LED red/green @5 Hz flash sequence ends, the unit is calibrated.

